

Much more than an eyepiece HYPERION[®]-eyepieces

How to use the modular eyepiece system –
illustrated instructions for the whole range of Hyperion accessories

baader
planetarium

Case included
with purchase of
Hyperion eyepiece-set

Full Set: 7 eyepieces, 5-24mm
Beginner Set: 4 eyepieces, 5/10/17/24mm

Individually packaged
Hyperion eyepieces:

Scope of supply for each
Hyperion 68° eyepiece:

1 2 3 4 5
dual
2" and 1 1/4" nosepiece

Ideal for binocular use:
Winged Rubber Eyeshield
(included in both sets)

1 1/4" (31,7mm Ø)
Dust Cap

Two end dust caps with inner
diameters of 48mm and 45mm

68° Hyperion eyepiece with
Phantom-Group[®] Coating and
two Photo-threads M43 and SP54

Soft-leather bag:
provides perfect
protection – takes
very little space

End dust caps

All Hyperion eyepieces are equipped with two dust caps which protect the eye lens side. This leaves you the choice of storing the eyepiece protected from dust with rubber eye cap folded down (especially for persons who wear glasses) or folded up.

System-threads M 43 and SP 54

The Hyperion threads are located beneath the rubber eye cap, or rather beneath the thread-protecting ring (made of high-quality, non-aging silicone rubber). The large number of Baader adapter rings allows use of the Hyperion eyepiece for (almost) every task in astronomical – and nature – photography as a high-quality projection optic or as a tele-extender.

The following pages describe in detail many of the adaptations and variations that are possible with the Hyperion system.



1 System thread M43



2 System thread SP54

Variable focal lengths with Hyperion 2" finetuning rings (FTR) 14 and 28 mm

also with 2" Baader eyepiece filters



Hyperion eyepiece
w. FTR 14 and 28 mm

Hyperion eyepiece with FTR 14mm
(this combination is also portrayed in
the picture below which features the
2" mirror star diagonal)

Available combinations of Hyperion eyepieces with Finetuning rings or
2" Baader Filter to modify the focal length and the field of view.

	Effective focal length in mm	Ø Field- stop mm	with 14 mm FTR	with 28 mm FTR	with 14 + 28 mm FTR	with 2" Baader Filter*	without first group of lenses
Hyperion**	24.0	28.0	--	--	--	--	--
Hyperion	21.0	22.5	17.6	19.9	15.5	17.5	14.0
Hyperion	17.0	20.9	13.1	17.1	10.8	14.1	9.2
Hyperion	13.0	17.7	10.8	14.6	9.2	12.5	8.1
Hyperion	10.0	15.0	8.4	11.6	7.1	9.8	6.1
Hyperion	8.0	10.7	6.0	8.6	5.0	7.1	4.3
Hyperion	5.0	6.5	4.0	5.4	3.2	4.5	2.6



Hyperion eyepiece with built-in
2" eyepiece filter (e.g. Infrared-blocking-filter
2459210 A)

A variety of additional Hyperion
focal lengths can be obtained
at very moderate prices by
using our 2" finetuning extension
rings 14mm and 28mm, or even our 2"
eyepiece filters. Thus an eyepiece of 5 mm focal length can be converted
into one of 2.6 mm focal length – without loss of sharpness – above all,
because no additional lenses are introduced into the beam, which is
unavoidable when using a Barlow lens.

For marginal cost such experimentation is possible. You will discover how
much your telescope can achieve, exceeding the recommended range of
magnification without an additional Barlow lens. You will experience sur-
prising results especially with refractors. With real apochromats the usable
exit pupil may be considerably smaller than the literature recommends!

* Baader 2" eyepiece filter with a
height of 8 mm. Yellow column of the
table: focal length, Light-Grey column:
diameter of the field stop
** non variable focal length

Hyperion eyepiece
with 1 1/4" barrel
unscrewed

Finetuning
2" extension ring
28 mm # 2958228

Finetuning
2" extension ring
14 mm # 2958214

2" stop ring with
captive brass locking
ring and two locking
screws # 2958027

Front Hyperion lens element,
built into the 1 1/4" barrel.

The M48 filter thread is located here!

To remove the first group of lenses,
all Hyperion eyepieces must only be
opened here (exception 24 mm).
Disassembling the eyepiece elsewhere
will void the warranty!

Combination of the Hyperion
eyepiece and the 14 mm
finetuning ring as well as the
2" stop ring

The stop ring prevents the eyepiece barrel
from hitting the mirror star diagonal or
prism.

Adaptation of Hyperion eyepieces onto Zeiss Diascope spotting scope

Hyperion eyepiece used as Diascope
camera adapter – an excellent substitue
for much more expensive Zeiss Diascope
Photoadapter

Visual Observation:

The Hyperion 21-/17-13-8 mm eyepieces may
be adapted to the Zeiss spotting scope with the
aid of a bayonet-adapter #2454500

Video-camera, e.g. Sony HDV

Hyperion DT-ring SP 54 / M 37
2958037

Hyperion extension DT-ring 11 mm
SP 54i / SP 54 a # 2958090

Hyperion eyepiece

1 1/4" Baader Diascope bayonet-
adapter # 2454500 with built-in
captive brass locking ring – slipped
over and fastened onto the
chromium-plated eyepiece barrel

Carl Zeiss Diascope 85 T*FL

www.hyperion-eyepieces.com

The whole family of Hyperion 68° eyepieces:



baader
planetarium

Authorized Hyperion Dealer:

We reserve the right for errors and technical changes • Illustrations may differ slightly from the original • Copyright by Baader Planetarium GmbH • Layout by MB-GRAFIK-DESIGN.
The terms Astro I-2 System[®] and Hyperion[®] are copyrighted. Any Use of our brand-names, copying or commercially using our sales-material without our expressive authorisation will be prosecuted.
We reserve all rights.

Hyperion eyepieces classical eyepiece projection

M43/T-2 adapter ring # 2958080 fits the smaller M43 system thread of the Hyperion eyepiece. Thus every Hyperion eyepiece can be used as a classical projection eyepiece. The whole range of adapter rings of our Baader Astro T-2 System® for moon- and planetary photography is available for this purpose. With eyepieces of 5mm and 8mm focal length, highest projection magnifications are easily attained.



Using SP 54 connecting rings, the objective of the camera and the Hyperion eyepiece may be connected with a minimum of separation distance.

Hyperion eyepieces afocal projection with DSLR-cameras

All adaptation requires careful handling. Before connecting the eyepiece tightly to the camera, please make sure that the lens surface of the camera lens is not touched or scratched by any part of the eyepiece.



Digital DSLR-camera for example: Canon EOS DSLR

Attachment to the camera lens using the Hyperion DT-ring SP 54/M 62 # 2958062
1mm thick spacer ring – optional to prevent contact between the lenses of the eyepiece and the camera lens # 2958001

Hyperion eyepiece system thread SP 54 is exposed by removing the thread-protecting silicone-ring.




Video camera with M 28 filter thread in front of the lens

Hyperion DT-ring SP 54/M 28 # 2958028

Hyperion 11mm long extension ring # 2958090 (required to adapt DT-rings SP 54/M 28 and M 37)

Hyperion eyepiece

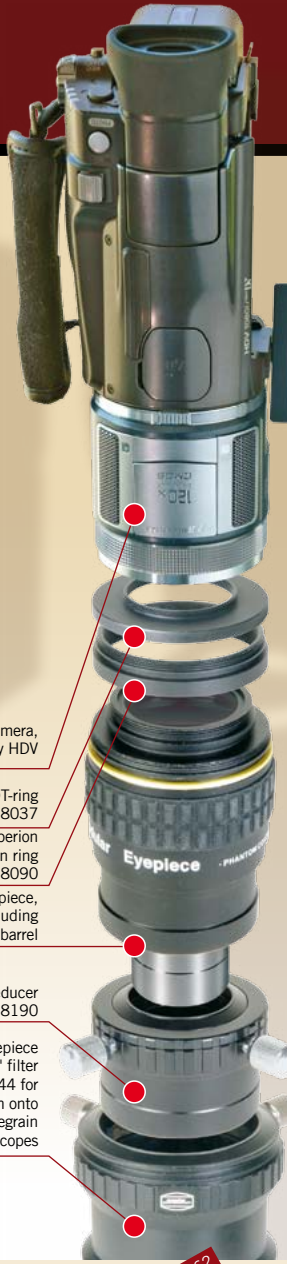

3" CCD Video-camera, e.g. Sony HDV

Hyperion DT-ring SP 54/M 37 # 2958037

Hyperion DT-extension ring # 2958090
Hyperion eyepiece, complete, including 1 1/4" barrel

2" to 1 1/4" Reducer #2408190

2" deluxe nosepiece with integrated 2" filter holder # 2958144 for adaptation onto Schmidt-Cassegrain telescopes




The same assembly as in the picture on the left – but with the first group of lenses removed

Recommendation:
The eyepiece should only be used without the first group of lenses for the purpose of afocal eyepiece projection imaging. The cameras field of view will be increased without a noticeable loss of edge sharpness. In visual observation, however, a loss of edge sharpness will be experienced when using the eyepiece without the first group of lenses.

Caution when mounting the first group of lenses!
The eyepiece may only be opened here. This exposes an M 48 filter thread which is necessary for attaching a 2" eyepiece filter to protect the dust-sensitive inner Hyperion lens surface (for example a 2" infrared-blocking-filter useful for photography)

Baader 2" eyepiece filter (e.g. Infrared-blocking filter # 2459210 A)

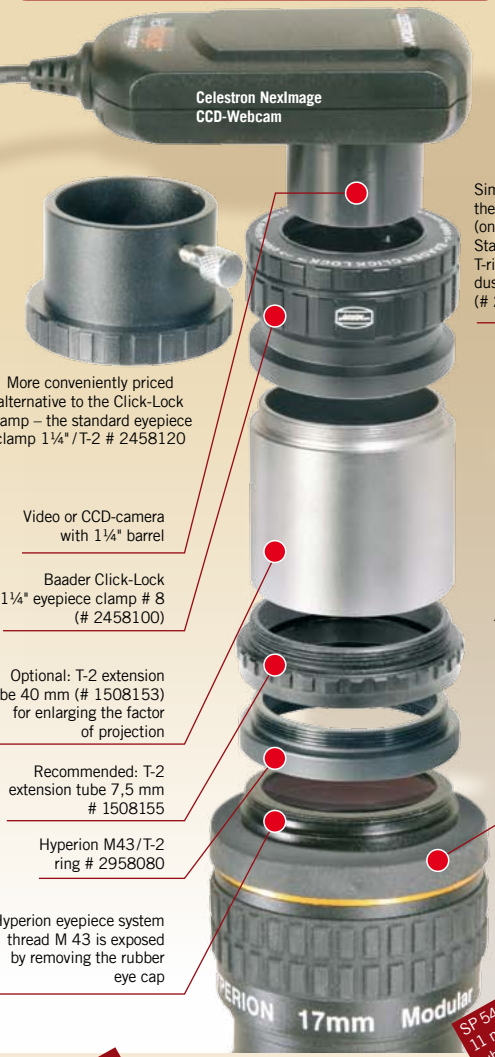

More conveniently priced alternative to the Click-Lock clamp – the standard eyepiece clamp 1 1/4" / T-2 # 2458120

Video or CCD-camera with 1 1/4" barrel

Baader Click-Lock 1 1/4" eyepiece clamp # 8 (# 2458100)

Optional: T-2 extension tube 40 mm (# 1508153) for enlarging the factor of projection

Recommended: T-2 extension tube 7,5 mm # 1508155

Hyperion M43/T-2 ring # 2958080

Hyperion eyepiece system thread M 43 is exposed by removing the rubber eye cap

Simpler alternative to the DSLR T-ring (on the right side): Standard EOS T-ring without dust-seal (# 2408319)

DSLR-camera e.g. Canon EOS (DSLR)

Protective Baader Canon EOS T-ring with built-in dust protection Infrared blocking filter # 2958550 L

Optional: T-2 extension tube 15 mm, increases the projection factor (# 1508154)

Optional: T-2 extension tube 40 mm (# 1508153), increases the projection factor

Recommended: T-2 extension tube 7,5 mm # 1508155

Hyperion M43/T-2 ring #2958080

SP 54 / M 54a Hyperion 11 mm extension ring, with rubber thread-protecting-cover for the SP 54 outer thread # 2958090

SP 54/M 28 DT-ring # 2958028 needs # 2958090

SP 54/M 37 DT-ring # 2958037 needs # 2958090

DT-ring SP 54/M 46 # 2958046

DT-ring SP 54/M 49 # 2958049

DT-ring SP 54/M 52 # 2958052

DT-ring SP 54/M 55 # 2958055

DT-ring SP 54/M 58 # 2958058

DT-ring SP 54/M 62 # 2958062

One adjustment spacer ring made of hard plastic for the SP 54 thread is part of each Hyperion DT-ring free of charge. With these spacer rings (each ring has a thickness of only 1 mm), differences in mechanical heights may be adjusted, to be able to adapt the camera front lens as close as possible, without having to use the 11 mm extension ring (# 2958090). Caution when mounting the camera! Camera-front lenses may be too close to the first lens of the Hyperion eyepiece only by a tenth of a millimeter. When mounting the Hyperion-eyepiece onto any camera-front-lens, always proceed with the greatest care, possibly using the additional spacer ring.

M43/T-2 Adapter # 2958080
For adapting to the Astro T-2 System®

Adapter system SP 54 –for afocal Projection:
The Hyperion DT-rings SP 54 are optimized to provide the shortest possible distance between the eye lens of the eyepiece and the digital camera lens. Only in this way a fully illuminated photographic field is possible without vignetting

Please consult our Astro-accessory pricelist to find further adapter rings, including the Astro T-2 System®.